

SEE818 - Quick Start Guide




Full Instruction Manual



www.systemq.com/PDF/manual/xSEE858.pdf

The SEE818 midi eyeball camera has a powerful IR array instead of multiple IRs, perfect for capturing top quality, true day to night images. It is Ideal for both outdoor and indoor uses with multi format output modes including; TVI, AHD, CVI and CVBS. IR range up to 30m (true day/night filter).

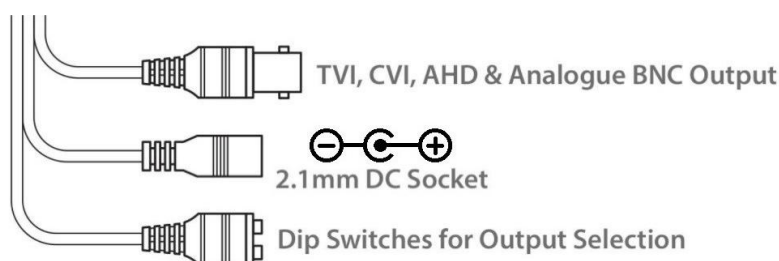


Powering the camera

The camera has a 2.1mm socket which requires 12V DC and the current consumption is 300mA, so use a regulated power supply rated at 500mA or above.

The camera is polarity sensitive so connections must be correctly made.

The camera has a standard BNC connector for the 4-in-1 video output. As default the output is set to HD-TVI 8MP which will work with the ZipXtreme DVR, however the output can be changed to AHD, CVI or CVBS if required.

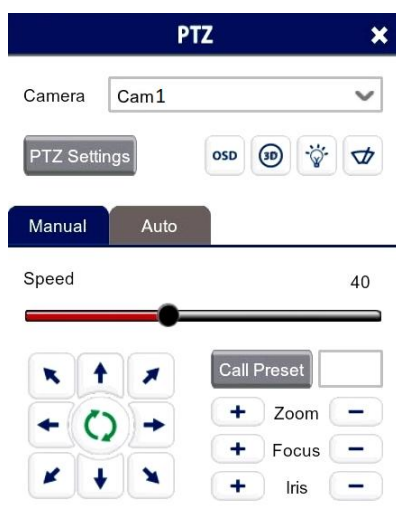

OSD Camera Menu

Via an DVR with a monitor & mouse direct to access the Cameras menu via coaxitron:-

1. Click on the image in Live view
2. Click on the PTZ button at the bottom of the screen
3. Click on the IRIS + button to display the menu

Use the directional arrows to move up and down through the menu.



Use the directional arrows left and right to change the option.

Use IRIS + to select and enter that menu option.

4-In-1 Technology

The video output can be changed with the dip switches on the fly-lead of the camera.

Please note the "Output Mode" in the menu of the DVR won't change the format, as the dip switch overrides the output. The dip switch configuration can be found below:-

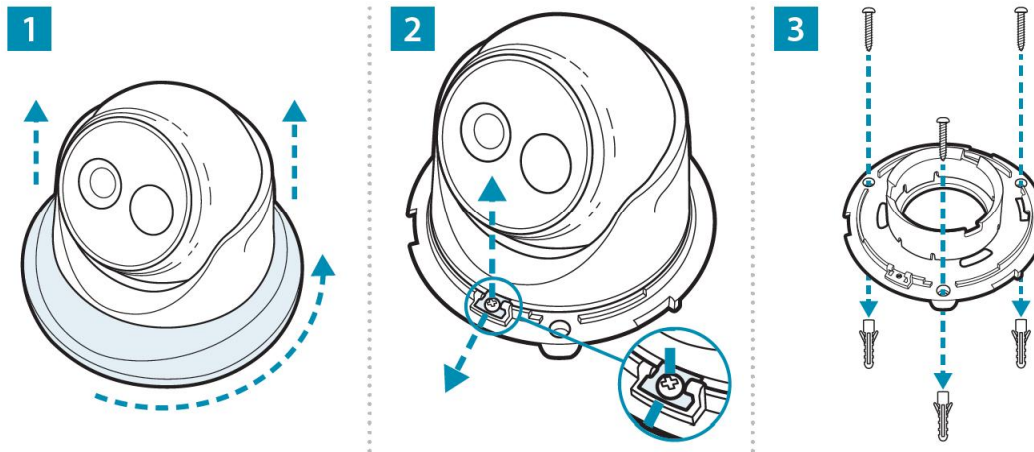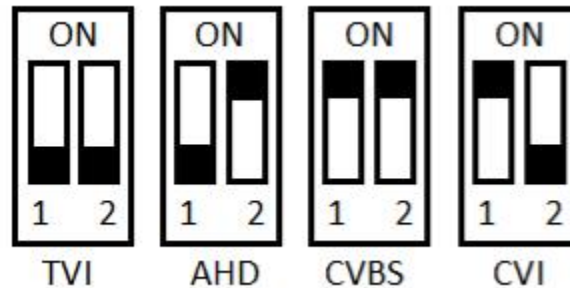

Resolution	4K (8MP)
Lens Type	3.6mm Fixed
Image Output	1 Volt Peak-Peak 75 ohm
Min.Illumination	0 Lux IR On
Day/Night	Mechanical (True Day-Night)
IR Range	30m
Input Voltage	12V DC
Current Consumption	300mA (IR On)
IP Rating	IP66
Video Connection	BNC Socket
Power Connection	2.1mm DC Socket
Finish	White/ Grey
Build	Metal
Dimensions	100mm (Diameter) x 90 mm (Height)

All specifications are approximate. System Q Ltd reserves the right to change product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, System Q Ltd cannot be held responsible for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment referred to.

