

VDP207 - Quick Start Guide

Full Instruction Manual



<http://www.systemq.com/PDF/manual/xVDP207.pdf>




The latest range of DoorKnox video entry products provides a mix and match system with a choice of door cameras and attractive video displays to suit any home or business reception area.

The new and improved DoorKnox VDP207 from serial numbers HCA01001 onwards have many new features.

Note:


DoorKnox Monitors from serial numbers VDP207 (HCA01001) & VDP210 (HCB00401) cannot be used along side existing DoorKnox Monitors with earlier serial numbers.


To make life easier all monitors feature the exact same connection layout as shown below.

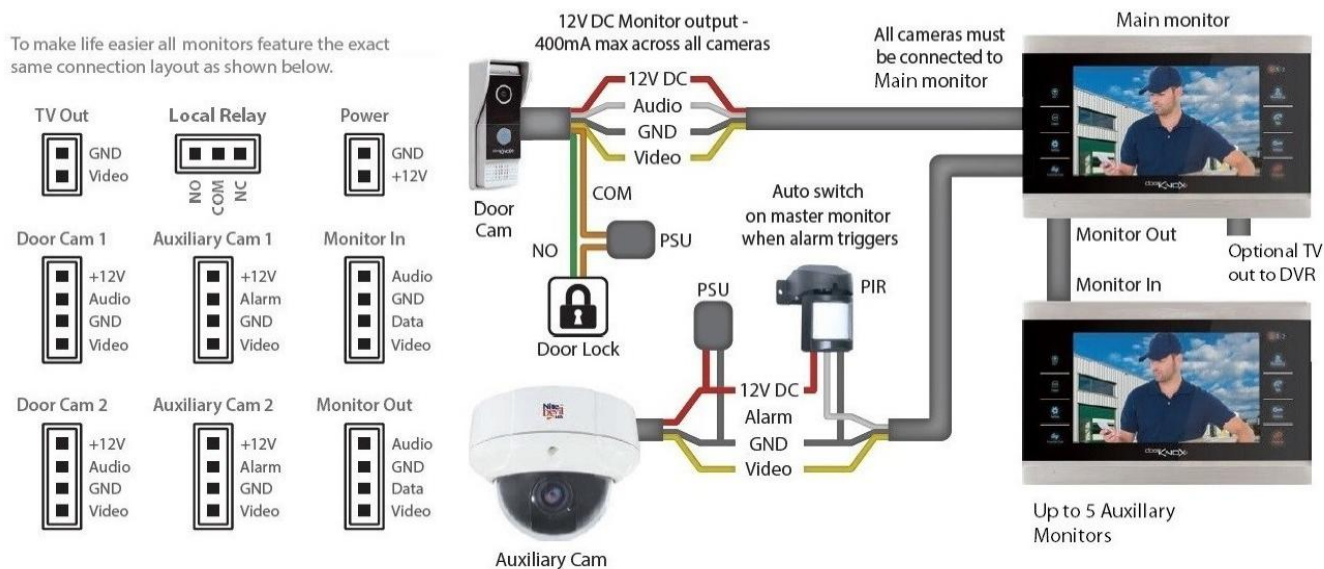

The mounting place is secured to the mounting surface and then the monitor slots on to it.

There is a large hold in the centre of the mounting plate to allow the cables to pass through.

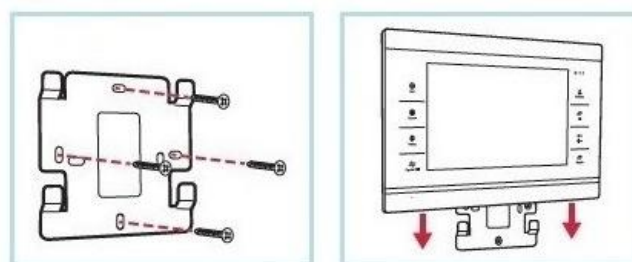

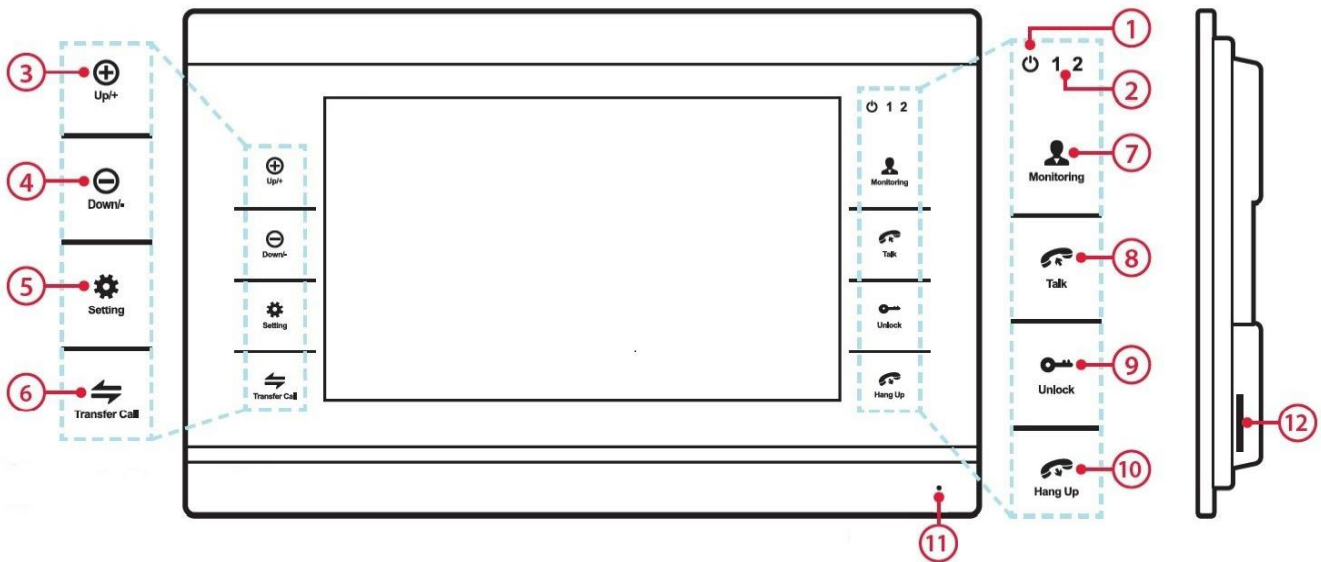

1	Power Indicator
2	Door camera indicator shows which camera is being displayed
3	Up - Volume up / Move up in menu system
4	Down - Volume down / Move down in menu system
5	Settings - Enter menu system / Press again to make selection
6	Transfer - Send call to other monitor(s) / Intercom

7	Monitoring - Switch between camera inputs
8	Talk - Answer call
9	Unlock - Unlock door connected to camera being displayed
10	Hang Up - End call / Return to previous screen / Cancel
11	Microphone
12	SD card slot

Setting Monitor ID

Up to 6 DoorKnox Monitors can be used, this means 1 Main Monitor and up to 5 Auxiliary Monitors.

The Main Monitor ID must be set to 1, and the Auxiliary Monitors ID range is set 2 to 6.

1. Select **Setting** on the monitor controls
2. Select **Settings**
3. Go to **System**




4. Set the **Device ID**, for Main Monitor (1) or Auxiliary Monitor (2-6)

Camera Switch

As default Door Cam 2 and CCTV (Auxiliary) Cameras are Turned off.

1. Select **Setting** on the monitor controls
2. Select **Settings**
3. Go to **Door Cams / CCTV Cams**
4. Select **Channel**, Then change **Status** in the list to **ON**



Screen Size	7"
Video Input	CVBS
Resolution	800 x 600
Camera Input	2x Door Cameras / 2x Auxiliary Cameras
Door Monitor Inputs	1
Door Monitor Outputs	1 (5 Auxiliary Max)
TV Monitor Outputs	1 (720 x 576)
SD Card	Micro SD / 2GB – 128GB Class 10 Min (32 GB Supplied)
Power /Consumption	12V DC / 1200mA (2A PSU Supplied)
Build	Brushed Aluminium & Plastic
Dimensions	(H) 165 x (W) 245 x (D) 23mm

All specifications are approximate. System Q Ltd reserves the right to change product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, System Q Ltd cannot be held responsible for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment referred to.

