

## **CAM525 Internal Dome Camera**

These dome cameras produce exceptional quality images using the Sony 1/3" Super HAD CCDII providing 650 TVL resolution. The cameras are housed in an attractive off white, plastic housing and are fitted with a 2.8 ~ 12mm varifocal lens. The cameras have RS485 connections for changing the OSD menu specifications remotely. NiteDevil and Wide Dynamic features are included.



### **Features**

1/3" SONY Super HAD CCDII  
650TVL  
2.8mm ~ 12mm varifocal lens  
NiteDevil functionality using Sense-Up  
OSD menu with RS485 remote updating

### **Mounting the Camera**

The camera is for indoor mounting on a wall or ceiling.

### **Powering the Camera**

The dome requires a 12V DC regulated power supply. The camera is provided with a fly lead with a mini power jack plug. It is recommended to use a power supply that is rated higher than the current consumption of the camera i.e. the current consumption is 75mA add approximately 50% so use a power supply of 100mA or above. Please ensure that power is connected correctly as this camera is polarity sensitive.

### **Connecting the camera to control equipment**


The dome camera comes with a fly lead for power and video out. To reduce installation time the video out lead is terminated into a male BNC connector. This allows the installer to effortlessly connect the camera to control equipment via a female BNC-BNC lead. Remember that the Video out from the camera is like any other electrical circuit and requires two wires to complete the circuit. When using a co-ax type cable such as RG59 or similar, the outer braid of the co-ax provides the "0V GROUND" connection and the inner core provides the "Video" connection.

### **RS485 connectivity**

An RS485 facility is provided to allow menu updates from a local or remote location so that there is no need to access the camera joystick to change camera settings. RS485 control can be initiated using an RS485 keypad or using the Alien DVR which can be accessed over the Internet using CCTVWindow. This means you can change the settings in this camera from anywhere in the world. The RS485 bare cable has two cores. The blue core is the RS485 plus (T+) and the brown core is the RS485 minus (T-). These connections must be made to the keyboard or DVR, T+ and T- observing matching polarity. Do not connect power to this cable.

OSD Menu

The CAM525 has an on screen display menu. This can be accessed using the small joystick controller on the camera flylead.





Press the centre button straight down to enter the menu and use Left, Right, Up and Down to move through and amend menu settings.

The following menu display is shown:



<b>EXP</b> Exposure	Lens	DC / ELC
	HBLC / D-WDR	BLC / HLI / D-WDR
	AGC	Off / Low / Middle / High
	3D DNR	Off / Low / Middle / High
	Sense Up	Auto / Off / x2 / x4 / x8 / x16 / x32 / x64 / x32 / x64 / x128 / x256 / x512
Exit		
<b>WB</b> Colour	W B Mode	ATW / Manual / AWC > Push / AWC
	R - Y Gain	0 ~ 256
	B - Y Gain	0 ~ 256
	Exit	
<b>D&amp;N</b> Day & Night	D&N Mode	Auto / Colour / B&W / EXT
<b>FUNC</b> Function	Mirror	Off / On
	Sharpness	0 ~ 30
	Monitor	Mode 1 / Mode 2
	Gamma	0.45 ~ 1.0
	LSC	On (0 ~ 30) / Off
<b>MOT</b> Motion	Motion	On / Off
	Area Sel	Top / Bottom / Left / Right
	Sensitivity	0 ~ 30
	Display	Off / Icon / Trace
	Hold Time	0 ~ 15 secs
	Alarm	On / Off
	Exit	
<b>PVM</b> Privacy Masking	Mask 1 ~ Mask 8	On / Off
<b>SET</b> Setup	Title	Off / On : 64 characters
	Manual DPC	Off / Manual: White or Black 0 ~ 255 / DPC Level 0 ~ 255
	Auto DPC	DPC Level 0 ~ 255
	OLPF	650 / 850
	OSD Colour	CRT / LCD
	Exit	
<b>SYS</b> System	Camera ID	0 ~ 255
	Communi.	Protocol : PELCO-D
	Language	Baud Rate : 2400 / 4800 / 9600
	Exit	
<b>EXIT</b>	Factory Set	
	Save & Exit	
	Exit	

**EXPOSURE**

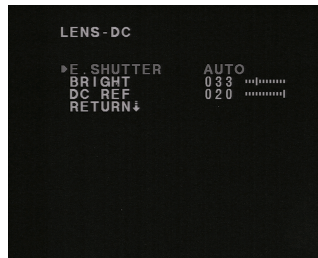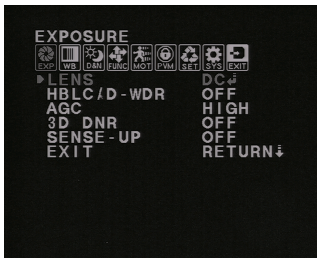

**E. SHUTTER**

AUTO <move joystick Right>  
1/50, 1/100, 1/120FLK, 1/250,  
1/500, 1/1000, 1/2000,  
1/4000,1/10000, 1/100000  
AUTO <move joystick Left>  
X2, X4, X8, X16, X32, X64,  
X128, X256, X512, X1024.



**LENS** DC / ELC  
DC ↗ Direct Drive Lens or ELC ↘ Electronic Lens

**BRIGHT**  
Set brightness 001 ~ 100

**DC REF**  
An Auto Iris requires a DC Reference 000 ~ 020



**HBLC / D-WDR** OFF / BLC ↗ / HLI / D-WDR ↘

**BLC**

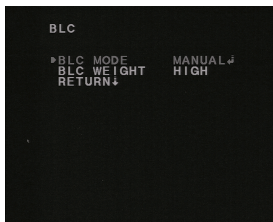

**BLC**  
Backlight compensation allows you to draw a box in area where there is bright light.

**HLI**

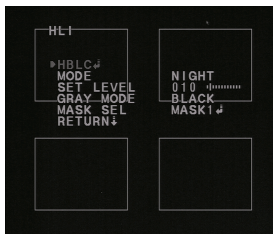


**HLI**  
High Level Backlight Compensation can be set to LOW, MIDDLE or HIGH and is used to reduce strong bright light by drawing up to four mask areas. Particularly helpful for reducing car headlights for number plate recognition.

MODE NIGHT / ALL DAY  
SET LEVEL 001 ~ 100  
GRAY MODE GRAY / D GRAY / BLACK  
MASK SELECT MASK1 / MASK2 / MASK3 / MASK4

HBLC LEVEL LOW / MIDDLE / HIGH


**D-WDR**



**D-WDR**  
Digital Wide Dynamic Range is used to merge light and dark areas using the twin elements in the CCD. This is useful when there is bright light and dark shadows in the picture.


D - WDR LEVEL 000 ~ 020

AGC

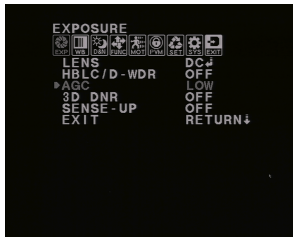

Automatic Gain Control  
OFF / LOW / MID / HIGH


3D DNR

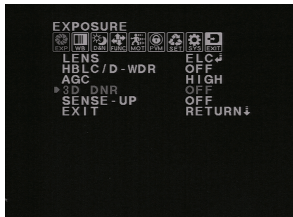

3D Digital Noise Reduction  
OFF / LOW / MID / HIGH / AUTO

When using SENSE - UP noise can be created and this option will reduce its effect.

SENSE - UP

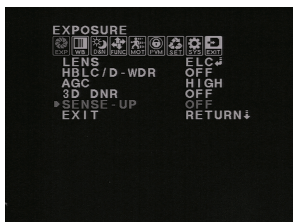


SENSE - UP  
OFF <move joystick left> AUTO  
OFF <move joystick right> X2 / X4 / X8 / X16 / X32 / X64 X128 / X256 / X512 /

This feature is the NiteDevil functionality and holds the shutter open slightly longer in order to capture more light.

EXIT


EXIT  
Press down to exit menu.

COLOR

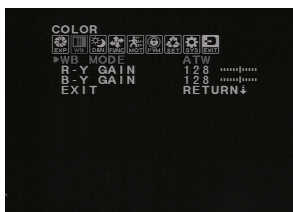

COLOR  
WB MODE / R-Y GAIN / B - Y GAIN / EXIT


- WB MODE ATW (Auto Tracking White Balance)  
<move joystick to right> MANUAL ↗ / AWC-PUSH / AWC
- R - Y GAIN Adjust Red Yellow gain 1 ~ 255 (Default 128)
- B - Y GAIN Adjust Blue Yellow gain 1 ~ 255 (Default 128)



M. WB R Manual Red gain  
M. WB B Manual Blue gain



DAY&NIGHT

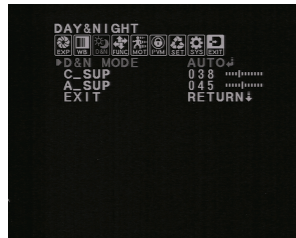


DAY&NIGHT

AUTO ↕ / COLOR / B&W / EX-CDS ↕

C\_SUP 000 ~ 100 Default 38  
Set to suppress colour noise in night mode

A\_SUP 000 ~ 100 Default 45  
Set aperture level suppression in night mode

D&N AUTO

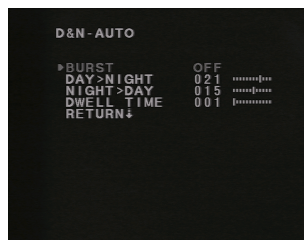


D&N AUTO

BURST OFF / ON  
DAY>NIGHT 000 ~ 030  
NIGHT>DAY 000 ~ 029  
DWELL TIME 000 ~ 015

Switch on BURST if night time pictures have poor definition. The DAY>NIGHT and NIGHT>DAY settings are for setting the amount of light needed before switching.

Note that these two settings cannot overlap each other and are max/min settings are dependent on each other. Dwell time is the time in minutes where light levels have to be constant before switching commenced.

EX-CDS




EX-CDS

BURST OFF / ON  
DAY>NIGHT 000 ~ 255 Default 210  
NIGHT>DAY 000 ~ 255 Default 100  
SMART IR AUTO ↕  
DWELL TIME 000 ~ 015 Default 001

Use this option only if using an external CDS sensor for IR light control. Switch on BURST if night time pictures have poor definition.


SMART IR AUTO

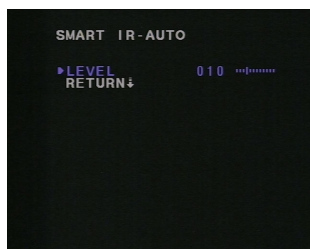

The DAY>NIGHT and NIGHT>DAY settings are for setting the amount of light needed before switching. Note that there is a wider range of settings for this option. Dwell time is the time in minutes where light levels have to be constant before switching commenced.

SMART IR 001 ~ 040 Default 010  
Adjusts the IR level.

FUNCTION

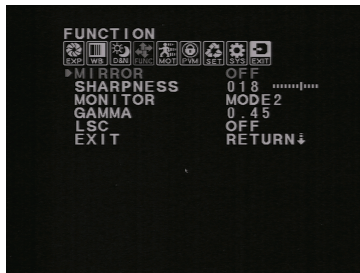

FUNCTION

MIRROR OFF / ON

Reverse video picture

SHARPNESS 000~030 Default 018

Set sharpness level

MONITOR MODE 1 / MODE 2

Use Mode 2 for LCD monitor or Mode 1 for CRT monitor


GAMMA 0.45 ~ 1.00 Default 0.45

LSC OFF / ON ↕

Lens Shading Compensation

EXIT

LSC

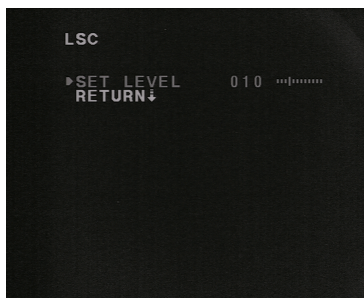

LSC

SET LEVEL 0 ~ 30 Default 010

Lens Shading Compensation compliments the quality of the lens by increasing the gain of the screen angle. Increasing the LSC level will increase the brightness around an object.

MOTION



MOTION

This option displays an alarm warning on the monitor to advise that motion has been detected. Up to 4 areas can be set.

Can select ICON or TRACE mode and set the time for the warning.

MOTION OFF / ON

Switch motion option on or off

AREA SEL AREA 1 ~ 4

Select up to 4 different areas for motion

SENSITIVITY 0 ~ 30 Default 25

Set motion sensitivity


DISPLAY OFF / TRACE / ICON

Trace displays selected window in area and ICON displays when motion detected.

HOLD TIME 0 ~ 15 Default 3 secs

Displays warning for time set

**PRIVACY**

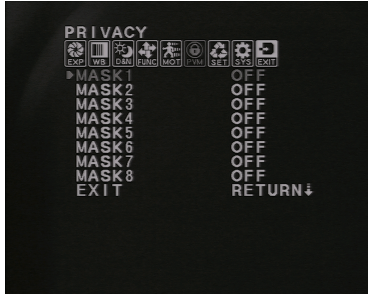

**PRIVACY**

This option allows the setting of up to 8 privacy masking areas that can be opened in up to 8 different colours to mask off areas that are not to be viewed.

MASK 1 ~ 8 ON / OFF

**MASK x**



**MASKx**


DOT SEL L\_TOP / L\_BOT / R\_BOT / R\_TOP  
Sets position of privacy masking area.

DOT XY  
Draw box size.

MOVE XY  
Move box to position.

COLOR SET BLACK / GRAY / WHITE / RED  
/ GREEN / BLUE / MAGENTA / CYAN  
Set box colour.

**SETUP**

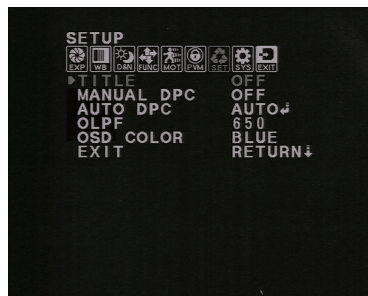

**SETUP**

TITLE OFF / ON  
Switch on to add a title display up to 64 characters.


← → When in Modify mode can move text

CLR Removes all text

POS Move text to a position


RET Return to previous menu

**TITLE**

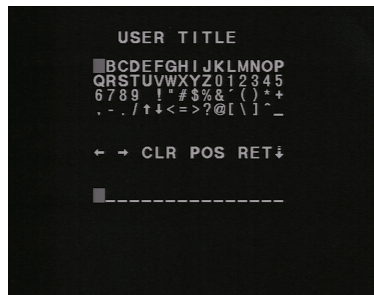

MANUAL DPC (Dead Pixel Compensation)  
OFF / MANUAL

This option compensates for dead pixels and can be run periodically.



**MANUAL DPC**



WHITE THR White threshold 0 ~ 255 Def 150

BLACK THR Black threshold 0 ~ 255 Def 030

DPC LEVEL Sets DPC Level 0 ~ 255 Def 030

AUTO DPC

Automatically runs dead pixel compensation

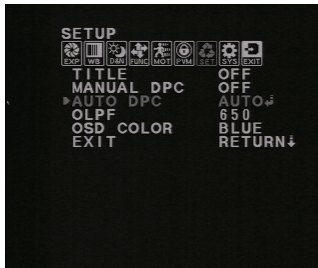


OLPF 650 / 850

Optical Low Pass Filter is used to blur straight lines by 1 pixel  
Set 650 for IR cut filter or 850 for IR-PASS

OSD COLOR BLUE / GREEN / RED / WHITE / BLACK /  
GRAY / MAGNETA / CYAN

SYSTEM

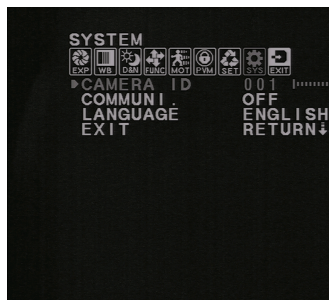

SYSTEM

This menu allows the use of the RS485 connections on the camera to change the menu settings. There is also an option to change the language for the menu.


CAMERA ID 000 ~ 255 Default 001

Ensure each camera accessed by RS485 has a unique ID number set.

COMMUNI OFF / ON

Set to allow RS485 connection and change baud rate.

LANGUAGE ENGLISH / CHINESE /  
JAPANESE / ITALIAN / RUSSIAN /  
PORTUGUESE / SPANISH / GERMAN /  
FRENCH

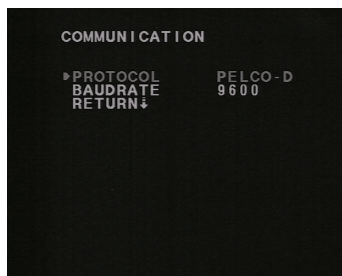

PROTOCOL PELCO-D

BAUD RATE 2400 / 4800 / 9600 / 19200

**RS485 Menu Control**

Using the RS485 to change menu settings can be a good option. Note the zoom and focus are manually set but all the menu settings can be changed using the RS485. The Alien DVR can be used to control access by using the PTZ option. This means if you run a CAT5 single matched pair from the camera to the DVR you can update the menu, from the DVR rather than having to use ladders to access the camera. A further benefit is if the DVR is remotely networked, you can update the menu from a remote location using the Alien client software. This is especially useful when installations are a long distance away, saving you transport and of course changes can easily be made when dark.

To enable control of the RS485 connection using a PTZ keyboard or Alien DVR, you need to do the following:

- a) Connect a CAT5 match twisted pair to the Blue (positive) and Brown (negative) RS485 camera terminal connector ensuring the + and – connections are correctly connected on the keypad or DVR. On the Alien DVR the T+ refers to the + and the T- refers to the – connections. The control works only on the PELCO-D setting and this must be set in the DVR PTZ menu for the correct channel. Also the baud rate must be set ( recommend 2400) in the DVR and in the COMMUNI option in the camera SYSTEM menu. Also ensure the Camera ID set in the camera menu is the same as the ID in the PTZ menu.
- b) Enter a CALL 95 via the DVR or keypad to display the menu. The arrow keys move up, down, left and right in the menu. The right arrow changes values and IRIS + will enter submenus and save settings.

Note that various keypads may have different keys allocated and the above is only a guide.

**CAM525 Camera Specifications**

Sensor	1/3" SONY Super HAD CCDII	RS485 control	Menu control
Resolution	PAL: 752 (H) x 582 (V)	Video Output	1 v p ~ p, 75Ω
TV Lines	650 TVL	AGC	Automatic
Min.Illumination	0.001 Lux	Power/Current	12vDC / 75mA
S/N Ratio	More than 50dB	Lens	2.8 ~ 12mm varifocal lens
Scan System	2:1 interface	Dimensions	127mm (D) x 95mm (H)
Sync. System	Internal, Negative sync	Weight	520gms
Elect. Shutter	PAL: 1/50s ~ 1/100,000s	Storage Temp	-30°C ~ +60°C
Gama	0.45	Operating Temp	-10°C ~ +50°C
		Colour	Off White



WEE/CG07835S

This symbol on the products and/or accompanying documents means that used electronic equipment must not be mixed with general household waste. For treatment, recovery and recycling please return this unit to your trade supplier or local designated collection point as defined by your local council.

*All specifications are approximate. Kover.com reserves the right to change any product specification or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, kover.com cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the camera or other equipment that these instructions refer to.*