

BAL304/308 Passive Video Baluns



BAL308
8Ch Passive Balun



BAL304
4Ch Passive Balun



Features

- Transmit Up To 200m
- Passive - No Power
- BNC Connections
- Twisted Pairs & RJ45 Video Out

Specification

FUNCTION	SPECIFICATION
Bandwidth	8 MHz
Video In Connections	BNC Sockets
Video Out Connections	Terminal Strips Or RJ45 Sockets
Max Distance	200m
Power	Passive (Not Required)
Dimensions	104 x 80 x 28mm (4ch) 157 x 90 x 28mm (8ch)

Options Available


PART CODE	DESCRIPTION
BAL304	4Ch Passive Balun
BAL308	8Ch Passive Balun

Transmit video down CAT5 up to 200m!


For maximum flexibility the BAL304 & 308 allow you to send up to 8 video signals 200m down CAT5 twisted pairs or an RJ45 cable.

These passive baluns can also be paired with active receivers to transmit video up to a staggering 1000m.

Connection Diagram

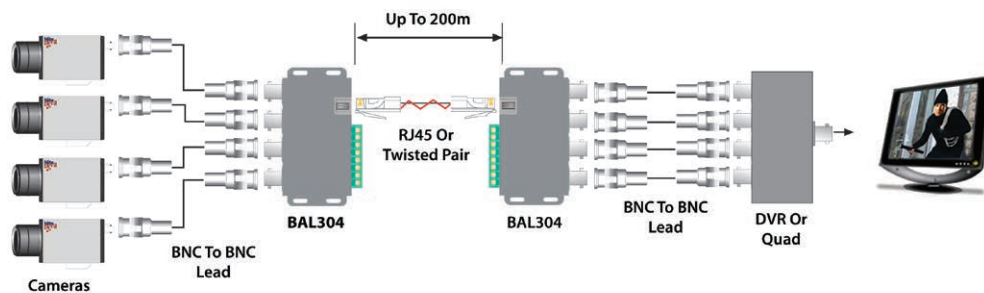

BAL304 - 4ch Passive Balun Connections

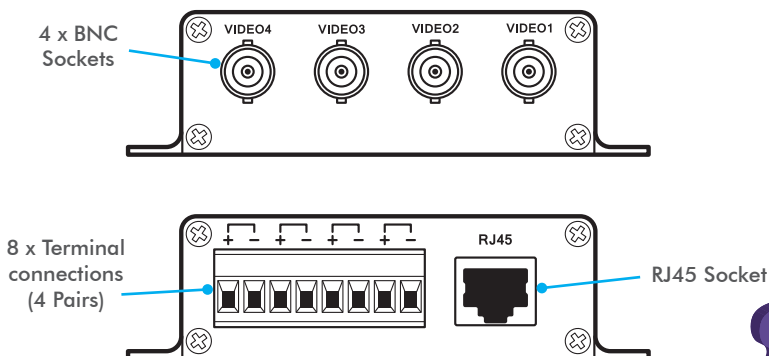

For more information on pairing passive and active baluns see online tip 317 ▶▶▶



Other Products To Consider



Mini 1ch Passive Baluns (Pair)
BAL102



Connectable 1ch Passive Baluns (Pair)
BAL106

The Expert's Advice...



"Ensure the order in which the pairs are connected at the camera end is replicated at the DVR end. Also only ever connect 1 pair to each terminal connection. Attempting to double up on pairs could damage the wires."


All specifications are approximate. System Q Ltd reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, System Q Ltd cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.



WEE/CG0783SS

This symbol on the products and/or accompanying documents means that used electronic equipment must not be mixed with general household waste. For treatment, recovery and recycling please return this unit to your trade supplier or local designated collection point as defined by your local council.

BAL308 - 8ch Passive Balun Connections

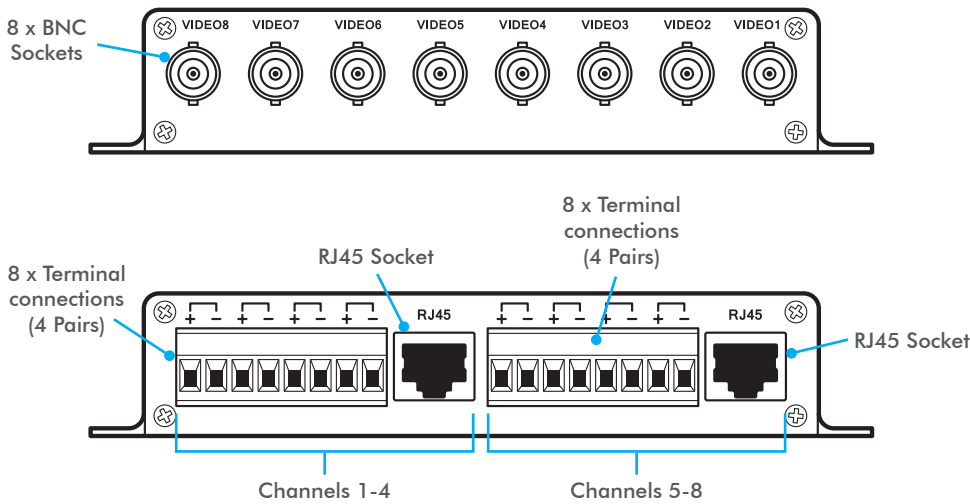

Features

- Transmit Up To 200m
- Passive - No Power
- BNC Connections
- Twisted Pairs & RJ45 Video Out

Specification

FUNCTION	SPECIFICATION
Bandwidth	8 MHz
Video In Connections	BNC Sockets
Video Out Connections	Terminal Strips Or RJ45 Sockets
Max Distance	200m
Power	Passive (Not Required)
Dimensions	104 x 80 x 28mm (4ch) 157 x 90 x 28mm (8ch)

Options Available

PART CODE	DESCRIPTION
BAL304	4Ch Passive Balun
BAL308	8Ch Passive Balun

Other Products To Consider



Mini 1ch Passive Baluns (Pair)
BAL102



Connectable 1ch Passive Baluns (Pair)
BAL106

The Expert's Advice...



"Ensure the order in which the pairs are connected at the camera end is replicated at the DVR end. Also only ever connect 1 pair to each terminal connection. Attempting to double up on pairs could damage the wires."

All specifications are approximate. System Q Ltd reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, System Q Ltd cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.



For more information on pairing passive and active baluns see online tip 317 ▶▶▶

This symbol on the products and/or accompanying documents means that used electronic equipment must not be mixed with general household waste. For treatment, recovery and recycling please return this unit to your trade supplier or local designated collection point as defined by your local council.

WEE/CG0783SS