



Features

- Discreet
- Compact Size
- 7.5mm Dia
- Low Voltage


Specification

FUNCTION	SPECIFICATION
Output Connection	3 Wire Fly Lead (CCT620) Phono & DC (CCT622)
Power	9 - 12V DC
Current Consumption	15mA (CCT620) 20mA (CCT622)
Frequency	100Hz - 5kHz
Gain	Fixed
Use	Internal Use Only
Cable Length	100mm (CCT620) 400mm (CCT622)
Output	600 ohms Unbalanced
Dimensions	7.5mm Dia x 30mm (Mic)

Tiny Covert Microphone Leads

Contains a microphone and pre-amp. Compact size, ideal for building in to other equipment. This tiny microphone will fit in the smallest of spaces such as drill holes. Two connection options are available, 3 wire fly lead or moulded phono and 2.1mm DC power.


How To Wire The CCT620

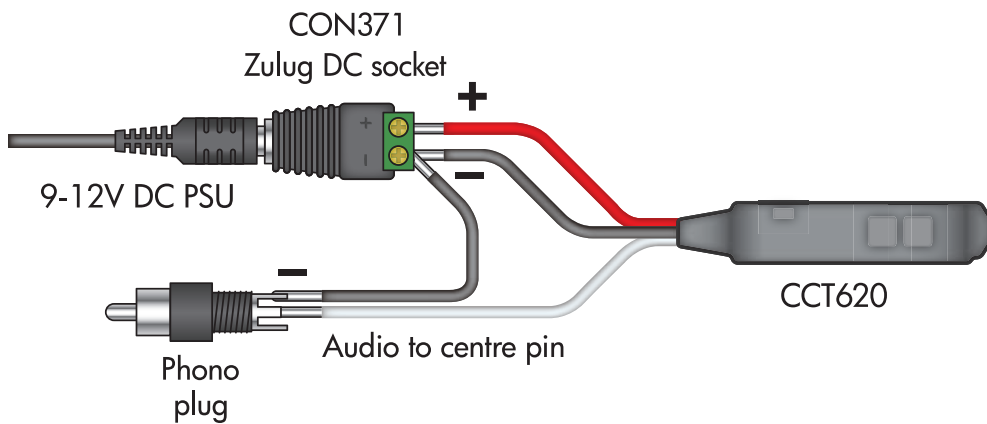

Options Available

PART CODE	DESCRIPTION
CCT620	3 Wire Fly lead
CCT622	Phono & DC Power

Other Products To Consider



Microphone Lead With Adjustable Gain Control
CCT621



Microphone With Adjustable Gain & Moulded Connections
CCT623

For a guide on adding audio to an existing CCTV system see online tip 292 ▶▶▶



All specifications are approximate. System Q Ltd reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, System Q Ltd cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.

This symbol on the products and/or accompanying documents means that used electronic equipment must not be mixed with general household waste. For treatment, recovery and recycling please return this unit to your trade supplier or local designated collection point as defined by your local council.
WEE/CG0783SS