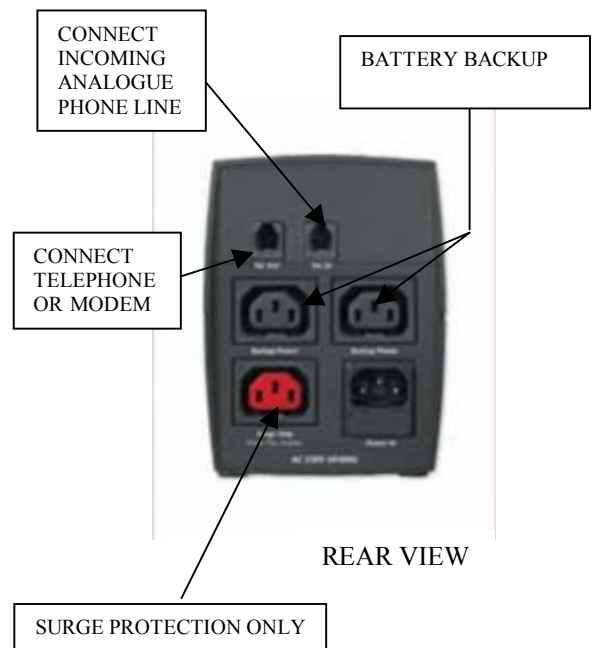


COM043 UN-INTERRUPTIBLE POWER SUPPLY 650VA

Protect your P.C data input using this UPS (Un-Interruptible Power Supply.) If a power failure occurs the internal backup battery takes over allowing you to save your files and work. The unit also provides surge protection for your P.C equipment, telephone, fax or modem. The COM043 is rated at 650VA allowing a total current consumption of 230 volts at 300W. The battery-protected output provides up to 20 minutes backup time for your computer equipment. This reliable backup power supply also has a third surge protected output for connecting e.g. printer/scanner etc.

**Technical Specifications**

Operation Type	Line Interactive	
Output Capacity	650VA	
Input		230 VAC
	Voltage Range	170 – 274 VAC
	Frequency	47/63Hz
Output		230 VAC
	Frequency	50/60 Hz
	Frequency Regulation	+/- 1 Hz
Surge Current Protection (J)		Max. 150
Maximum Surge Current (Amp)		6,500 Amps
Transfer Time	(typical)	Less than 3 ms
Battery	Battery type & no.	12 V/7 AH, 1 pc
	Backup time (mins)	26 - 45
	Charge Time	8 hours to 90% after full discharge
Operational Limits	Temperature & Humidity	0 - 40°C, 0-90% relative humidity
	Noise Level	<40 dB
Weight		6.7 Kg
Minimum Load		51W

**Operation Instructions**

This unit IS RATED AT 650va but to improve life of the unit and run with maximum efficiency it is recommended to limit the total wattage to 300W. Use the two backup power sockets for units involving data storage i.e P.C, CD/DVD writer etc. and use the Surge Only supply for a printer/fax/scanner. Do not overload the unit as this will seriously degrade the battery backup life. A separate filter is available for surge protection for the phone/fax or modem. Before first use or immediately after the batteries have been discharged, charge the batteries without load for eight hours. A line fuse is incorporated in a compartment below the power in socket. This is rated at 250v 8Amp. A backup fuse is also included in compartment. To start UPS press top button. The status led should illuminate fully to show that power is connected. When UPS reverts to battery backup the status led will flash. To prolong battery life, fully discharge the battery and recharge once every three months. Note always keep UPS at least 20 cm from your monitor.

All specifications are approximate. Anti-hum.com reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, anti-hum.com cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.



This symbol on the products and/or accompanying documents means that used electronic equipment must not be mixed with general household waste. For treatment, recovery and recycling please return this unit to your trade supplier or local designated collection point as defined by your local council.