


## 2 Port VGA Video Splitter

### CON600 VIDEO SPLITTER

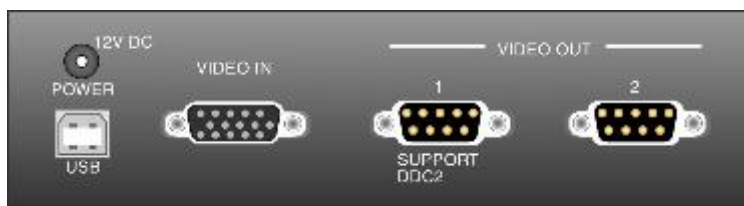

This VGA splitter duplicates and increases video signal from one input to two outputs. It provides greater bandwidth and high video resolution and extends the transmission distance up to 65 metres.

#### **Features**

- One VGA video input and TWO VGA video outputs
- Long distance transmission up to 65 metres
- High video resolution – up to 2048 x 1536 @ 80Hz
- Free power supply – Input 240v 200mA Output 7.5v 350mA or via USB cable supplied
- Supports: VGA, XGA, SVGA, UXGA and multi-sync monitors
- Operating System supported: Windows 2000, Windows XP, Linux, Mac and Sun
- DDC, DDC2 and DDC2B compatible (port 1 only) (DDC = Display Data Channel)

#### **Technical Specification**

Power Properties	Voltage Range	7 ~ 18v DC	Indicators	Power LED	Green
	Power Consumption	200 mw	Stability	MTBF	>20,000h
	Power Connections	2.1 Jack, USB-B	Physical Properties	Dimensions L x W x H	138x65x32mm
Video Properties	Video Input Connector Resistance	15 pin HDB Male 75Ω		Housing Material	Metal
	Video Output Connectors Resistance	2 x 15 pin HDB Female 75Ω		Colour	Black
	Signal Band	>350MHz(- 3dB)		Weight	Net Weight
Synchronous Signal	0-5v,TTI PWL	Environmenta l	Operating Temperature		0°C ~ 70°C
Driving Current	>6 mA		Relative Humidity		10 ~ 85%
Timelag	<15ns		Storage Temperature		-10°C ~ 80°C
Accessories	USB Cable	DDC2 Supports	The Output close to Input	Casing	Case Size (L x W x H)
		1.5m, USB-A ~ USB- B	280 x 192 x 75mm		

*All specifications are approximate. Kovert.com reserves the right to change any product specification or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, kovert.com cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the camera or other equipment that these instructions refer to.*



This symbol on the products and/or accompanying documents means that used electronic equipment must not be mixed with general household waste. For treatment, recovery and recycling please return this unit to your trade supplier or local designated collection point as defined by your local council.

