


Features

- 16 x Video BNC Outputs
- 1 x Video BNC Input
- 12v DC 500mA
- 240 v AC (free 12v PSU)
- Power Switch & LED
- Metal construction
- Rack mounting 1U space



This video distributor allows one video input and provides sixteen video output channels. Typical use would be to duplicate a single video input to up to 16 times for multiple outputs to DVRs and Monitors. This unit is 240 v AC so is not suitable for external use.

Technical Specifications	CCT208 Video Distributor
Input Voltage	220/240v AC
Video Input	0.8Vp-p to 1.2Vp-p/75 ohm - 1 Input
Video Output	1.0Vp-p /75 ohm - 16 Outputs
Power Supply	12V DC
Power Consumption	500mA
Frequency Response	10Hz to 10MHz
Weight (g)	2050
Rack Size	19" standard 1U Rack Panel
Construction	Metal
Dimensions	483mm(W) x 44mm(H) x 189mm(D)

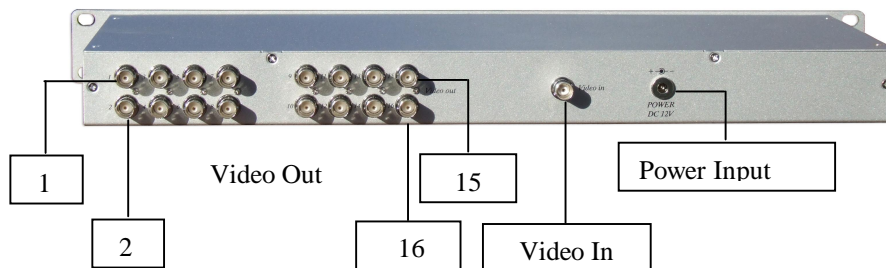

All specifications are approximate. Kovert.com reserves the right to change any product specifications or features without notice. Whilst every effort is made to ensure that these instructions are complete and accurate, kovert.com cannot be held responsible in any way for any losses, no matter how they arise, from errors or omissions in these instructions, or the performance or non-performance of the equipment that these instructions refer to.